

High-Quality Pumps


TERAL "SABILESS" FOOT VALVE

Are For You

Lever Installed

"SABILESS" FOOT VALVE

FOR HIGHER SAFETY OF THE PUMPS, PLEASE USE
TERAL LEVER-INSTALLED "SABILESS" FOOT VALVE

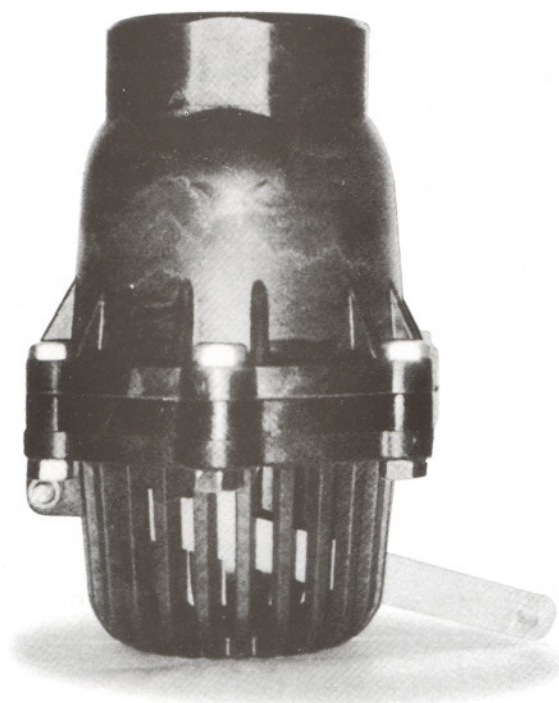

LEVER INSTALLED

"SABILESS" FOOT VALVE

- TERAL "SABILESS" FOOT VALVE is the most sophisticated foot valve developed and designed by the latest technology and fruits of the many-years research and development activity by TERAL Pump Group.
- This clears any problems and enjoys a good reputation of the trust concerning pump equipments.
- As for the basic materials of this foot valve, "ARLS" newly developed by TERAL, Japan can be 100% stainless and are perfectly rot-free.
- Hydraulically better designed type of this foot valve assures all kinds of pump systems to make the best operational performance than any other metal types.
- This also prevents water leakage from packing and damages to packings as well as any dusts into the packings by employing the specially global face methods.

•All above features of TERAL "SABILESS" FOOT VALVE make the maintenance-free come true FOR YOU


SPECIFICATIONS: 32mm ~ 80mm (ARLS made/POLYCARBONATE)
100mm ~ 350mm (TERAL FC made)

TERAL


M R M CO.,LTD

57 MRM Building, Soi Preeyanuch (Rama IX 19) Rama IX Rd.,
Bangkapi , Huay Kwang , Bangkok 10310
Tel : 0-23199911 Fax : 0-23199912


TERAL FOOT VALVE

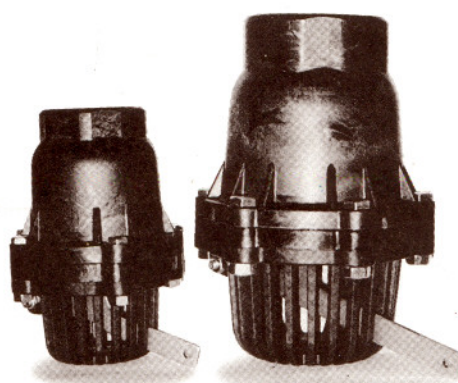


• $\phi 40\sim 80$

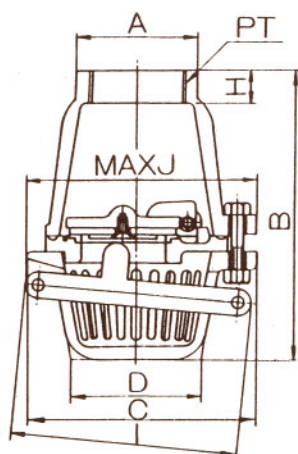

• $\phi 100$

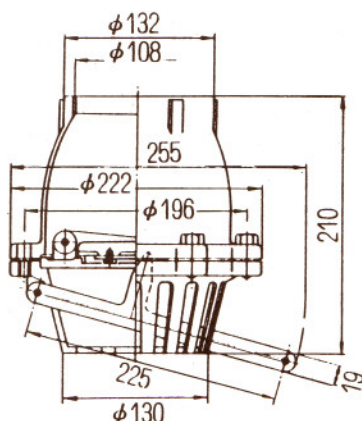

• $\phi 125\sim 200$

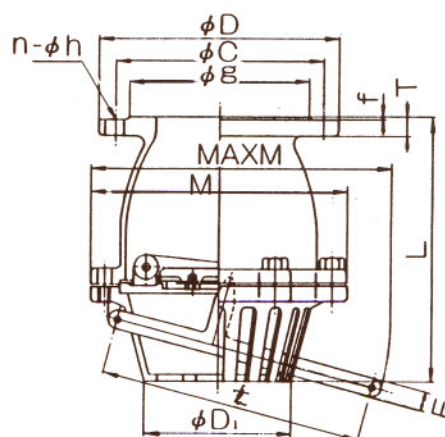

DEMENSIONS

Code Diameter	A	B	C	D	H	I	MAXJ	WEIGHT (Kg.)
32/40	60	156	98	65	16	128	130	0.9
50	75	175	145	80	20	146	158	1.2
65	90	207	174	100	22	160	170	2.0
80	108	240	180	118	26	182	190	2.7
100	132	210	225	130	32	222	255	7.5

Code Diameter	L	C	D	D1	F	f
125	265	210	250	150	19	2
150	300	240	260	170	19	2
200	420	290	330	193	19	2
250	445	355	400	350	19	2
300	617	400	445	385	19	-
350	562	445	490	495	19	-

Code Diameter	g	n-On	T	t	M	MAXM	WEIGHT (Kg.)
125	185	8-19	20	275	268	320	20
150	215	8-19	22	310	304	360	24
200	265	12-19	22	400	378	460	50
250	325	12-25	23	420	445	480	75
300	-	16-25	32	478	515	538	138
350	-	16-25	34	580	590	640	160