

Special Accessories

Liquid Level Regulators - All models are of an environmentally-friendly no-mercury structure.


LC “Level Switch”



MS “Mini Switch”



FV “Oval Float”

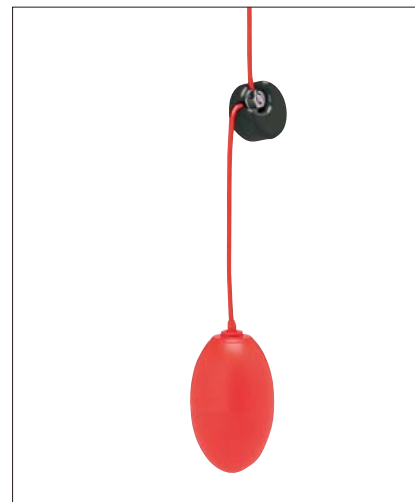

Features

LC Useful for potable water, wastewater and sewage containing suspended solids. Strong for corrosion or rust even when immersed in a corrosive liquid.

MS Useful for wastewater and sewage containing a few suspended solids. The MS is available in two types, MS11 (single float) and MS21 (double float).

FV Useful for fresh water as well as wastewater not containing suspended solids. A single FV can control both the upper and lower liquid levels.

Specifications

Model		LC12	MS11, MS21	FV11
Switch		Micro switch	Reed switch	Reed switch
Specific gravity of liquid		0.95~1.15	0.95~1.10	0.95~1.10
Liquid temperature		0~60°C		
Voltage		AC/DC30V or under		
Max operable current		5A	0.5A	0.6A
Cable length		6m, 13m, 20m (with cable extensions in 10m increments) MAX. length 100m		
Cable type		0.75mm ² ×3 cores, Flat type	0.2mm ² ×2 cores×O.D.4.7mm	0.5mm ² ×2 cores×O.D.5.8mm
Weight (including cable)		6m:1.2kg, 13m:1.6kg, 20m:2.0kg	0.6kg (MS11, 6m cable)	1.0kg (6m cable)
Material	Case	Polypropylene resin	ABS resin	Polypropylene resin
	Cable	PVC		
	Others	Chain: 304 stainless steel	Sinker:PVC Resin coating is applied to FC 150	Sinker:The FC200 is coated

Specifications and dimensions are subject to change without notice.

ShinMaywa Industries, Ltd.

Sales & Marketing Dept., Fluid Div. 3-2-43, Shitte, Tsurumi-ku, Yokohama, 230-0003, Japan
Phone : +81-45-584-1322 Fax : +81-45-575-2286
E-mail : global.pump@shinmaywa.co.jp

ShinMaywa (America), Ltd.

Head Quarters
10737 Gateway West, Suite 240,
El Paso, Texas 79935, U.S.A.
Phone : +1-915-594-9862
Fax : +1-915-594-9866
E-mail : info@shinmaywaamerica.com

North Carolina Branch
6135 Park South Drive, Suite 510
Charlotte, NC, 28210, U.S.A.
Phone : +1-704-945-7112
Fax : +1-704-945-7101
E-mail : pump@shinmaywaamerica.com

URL : <https://www.shinmaywa.co.jp/america/index.html>

ShinMaywa (Asia) Pte. Ltd.

8 Burn Road, #14-10 Trivex,
Singapore 369977
Phone : +65-6224-0728
Fax : +65-6224-9678
E-mail : asia.ad@shinmaywa.com.sg

ShinMaywa (Shanghai) Trading Co., Ltd.

201107 Building 6, Youleji City, Industrial Park, 333 Lane,
Zhujian Road Minhang, Shanghai, China
Phone : +86-21-5296-2966
Fax : +86-21-5296-2970
E-mail : shanghai@shinmaywa.co.jp

ShinMaywa ONO PLANT

ISO 9001-0066539/ISO 14001-0066652